

Rec'd PTO 13 JUL 2004



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

REC'D 20 MAR 2003

WIPO PCT

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears an amendment, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

*He Behen*

Dated 28 February 2003

**BEST AVAILABLE COPY**

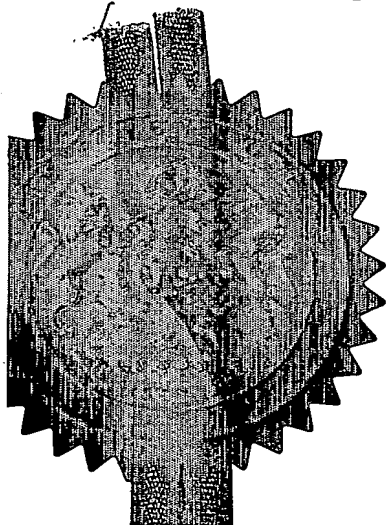

**Request for grant of a patent**

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



123 JAN 2002

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP9 1RH

1. Your reference JLWM/P33388GB

2. Patent application number  
(The Patent Office will fill in this part)

**0201478.5**

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Aurora Limited  
Unit 1B, The Courtyard  
Alban Park  
Hatfield Road  
St. Albans  
Hertfordshire AL4 0LA  
England and Wales

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

8309809001

4. Title of the invention

LAMPS

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Kilburn & Strode  
20 Red Lion Street  
London  
WC1R 4PJ

SOMMERVILLE & RUSHTON  
HS GROSVENOR ROAD  
ST ALBANS  
HERTS

Patents ADP number (if you know it)

125001

AL 3AW

1311001

51/77  
02-11-03  
4P.

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

YES

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form

Description	6	—
Claim(s)	3	—
Abstract	1	—
Drawing(s)	5	+ 5 RN

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

1

Request for substantive examination (*Patents Form 10/77*)

Any other documents  
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date 22/01/02

*KILBURN & STROUD*

12. Name and daytime telephone number of person to contact in the United Kingdom

Mr. J L W Miller

Tel: 020 7539 4200

**Warning**

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

DUPLICATE

# LAMPS

The present invention relates to lamps and light fittings and buildings incorporating such lamps. The invention relates in particular to lamps for downlighters such as dichroic lamps and 12V or mains electricity lamps.

A known lamp for a downlighter has a light source and a reflector for reflecting light emitting from the light source. The reflector has a square or hexagonal section when viewed along a longitudinal axis of the lamp. The reflector includes a series of reflection panels, four panels in the case of a lamp with a square section and six panels in the case of a lamp with a hexagonal section. Each reflection panel is totally planar, having a totally planar front surface. The light pattern projected from such lamps is of substantially varying luminosity across a surface on to which light is projected from such lamps. This is undesirable in many applications.

It is an object of the present invention to provide a lamp with improved projection characteristics. It is a further object of the invention to alleviate the problems of the prior art.

According to a first aspect of the present invention there is provided a lamp having a light source, and a reflector for reflecting light emitted from the light source, the reflector having a non-circular section when viewed along a longitudinal axis of the lamp, wherein the reflector includes a series of reflection panels, each reflection panel including a plurality of distinct light reflection elements formed thereon. The use of distinct light reflection elements on each panel enables a more desirable projection beam to be obtained from the lamp.

Preferably, each reflection panel is generally outwardly concave in form towards the light source.

According to a second aspect of the present invention there is provided a lamp having a light source, and a reflector for reflecting light emitted from the light source, the reflector having a non-circular section when viewed along a

longitudinal axis of the lamp, wherein the reflector includes a series of reflection panels, each reflection panel being generally outwardly concave in form towards the light source.

5 The generally outwardly concave form of each panel provides a more desirable light projection beam for the lamp.

Preferably, each reflection panel includes a plurality of distinct light reflection elements formed thereon.

A number of optional and preferred features will now be described being applicable to either aspect of the invention mentioned above.

10 Preferably, the reflection panels form the sides of a truncated pyramidal form, the number of sides thereof equalling the number of panels. Preferably, there are between three and twelve said panels. For example, four panels may be provided, or six said panels may be provided. When four said panels are provided, the four panels may form the four sides of a truncated pyramid.  
15 When six panels are provided, the six sides may form the six sides of a truncated pyramid. The sides may be slightly curved when viewed in a cross-section taken through a longitudinal axis of the lamp. The sides may be substantially flat when viewed in a cross-section perpendicular to a longitudinal axis of the lamp.

20 Preferably, the lamp has a flat front face. Thus, the flat front face may close off the reflector so as to prevent the ingress of dust and suchlike.

The lamp may be adapted for operating at 12V or alternatively at mains voltage, such as 240V. Preferably, the lamp has a maximum cross-dimension less than 100mm and may have a maximum dimension between 30mm and  
25 70mm, such as about 50mm.

Preferably, each light reflection element, where provided, includes a convex front surface. This assists in providing a desirable projection beam from the lamp, such as when it is desired to produce a smooth beam with relatively constant luminosity across the beam at a surface located about 1m or  
30 more from the lamp. Each light reflection element may be elongate. Each light

reflection element may extend in a direction perpendicular to a longitudinal axis of the lamp.

Preferably, between five and twenty said light reflection elements are provided on each panel. About eight to ten said elements may be provided on each panel, nine said elements being provided in one example.

Preferably, the light source is enclosed in a chamber, the chamber being located inside a generally truncated pyramidal space formed by the reflector. The light source may comprise a metal filament adapted to produce light upon application of electricity thereto.

According to a further aspect of the invention there is provided a light fitting including a lamp as set out in either aforementioned aspects of the invention fitted thereto, the light fitting being adapted to be fitted to a layer of building material with the lamp substantially recessed.

According to a further aspect of the invention there is provided a building including a light fitting with a lamp as aforementioned fitted thereto.

The present invention may be carried out in various ways and a number of lamps and light fittings in accordance with preferred embodiments of the invention will now be described with reference to the accompanying drawings, in which:

Figs.1A to 1G are various views of a preferred embodiment of a hexagonal lamp in accordance with the present invention, and Fig.1H showing a preferred hexagonal circlip which may be used therewith;

Figs.2A to 2G are various views of a preferred embodiment of a square lamp in accordance with a preferred embodiment in the present invention;

Fig.3 is an exploded view of various components of a light fitting of which the lamp of Figs.2A to 2G may form part;

Fig.4 is an exploded view of an alternative set of light fitting components; and

Fig.5 shows schematically the lamp of Figs.2A to 2G and various components from the embodiment of Fig.4 installed in the ceiling of a building.

Figs.1A to 1G show various view of a preferred embodiment of a lamp 10 in accordance with an embodiment of the present invention. The lamp 10 has a hexagonal cross-section when viewed along a longitudinal axis of the lamp, i.e. the views shown in Figs.1A and 1G. The lamp 10 has a light source 14 comprising a metal filament 16 enclosed in a sealed chamber 18. The lamp 10 also has six reflection panels 20. Each reflection panel includes a plurality of distinct light reflection elements 22 formed thereon. Each light reflection element is elongate and extends in a direction perpendicular to a longitudinal axis of the lamp. As shown in Fig.1F which is a cross-section on line F-F in Fig.1A, there are nine reflection elements. The plurality of convex reflection elements assist in projection of a light beam of relatively constant luminosity across the beam.

Additionally, it will be seen from Fig.1F that each panel 20 has a generally concave form facing the light source 14, this form assisting in providing a higher quality projection of light from the lamp.

The lamp also includes a flat front 24 which may be of glass or other lamp transmitting material. The body of the lamp 10 may generally be of glass or other suitable material, with the inwardly facing surfaces 26 being silvered for reflection purposes. The filament 16 is connected to electrical pegs 28 for the provision of electricity.

Figs.2A to 2G show a similar lamp 10', which to all intents and purposes is similar to the lamp of Figs.1A to 1G, apart from the fact that only four reflection panels 20' are provided such that the lamp has a square section when viewed along the axis thereof, such as in the views of Figs.2A and 2G. Additionally, as shown by Fig.2F, only eight light reflection elements 22' are provided on each panel 20'.

Fig.3 shows an exploded view of a downlighter fitting 30 for use with the lamp of Figs.2A to 2G. The fitting 30 includes a support surround 32 which, as schematically shown in Fig.5, may be installed in the region of an aperture 34 formed through a layer of building ceiling material 36 of a building

38 having a wall 40. The lamp 10' is held removably against a recessed ledge 42 of the support surround 32 by a square circlip 44, the circlip having projections 46 for resilient engagement in apertures 48 of a square wall 50 which extends rearwardly from a front flange 52 of the support surround 32.

5 The circlip 44 also includes parallel-spaced release elements 54 which may be forced together manually or by a tool for application or removal of the circlip for application or removal of the lamp relative to the support surround 32. Retention springs 56 are attached rearwardly extending flanges 58 of the support surround and ends 60 of the springs 56 (which are torsion springs)  
10 force the support surround 32 against the ceiling material 56 to hold the support surround releasably in position.

An electrical connector 62 may be connected to the pegs 28' of the lamp 10' for the supply of electricity wires 64 to the lamp 10' from an electrical connector 66, the connector including a housing 68, lid 70 and connection  
15 device 72 so that the lamp 10' may be powered either by a transformer, battery or with mains or other suitable electricity.

A bracket 74 is provided for holding the connector 66 in place, with a finger 76 of the bracket engaging in a cylindrical spring portion 78 of one of the springs 56 for retention thereof.

20 Fig.4 shows an alternative embodiment in which the lamp 10' is retained against a rearwardly facing ledge 80 of a front facia 82 of the light fitting 84. The lamp is compressed against the ledge 80 by springs 86 attached to connector 62' at one end and attached to apertures 88 formed in walls 90 extending rearwardly from a front flange 92 of the front facia 82. The front  
25 facia may be releasably coupled to support surround 94 by spring clips 96 which engage behind ledges 98 on the support surround 94. Similar springs 54, as well as a bracket 74, wires 64 and connector 66 are provided to those provided in the embodiment of Fig.3.

Fig.1H shows a hexagonal-sectioned circlip 200 for holding the lamp 10  
30 on a light fitting.



It will be appreciated that various modifications may be made to the embodiments described without departing from the scope of the invention as defined by the claims interpreted under patent law.

## CLAIMS

1. A lamp having a light source, and a reflector for reflecting light emitted from the light source, the reflector having a non-circular section when viewed  
5 along an axis of the lamp, wherein the reflector includes a series of reflection panels, each reflection panel including a plurality of distinct light reflector elements formed thereon.

2. A lamp as claimed in claim 1 in which each reflection panel is generally  
10 outwardly concave in form towards the light source.

3. A lamp having a light source and a reflector for reflecting light emitted from the light source, the reflector having a non-circular section when viewed along a longitudinal axis of the lamp, wherein the reflector includes a series of  
15 reflection panels, each reflection panel being generally outwardly concave in form towards the light source.

4. A lamp as claimed in claim 3 in which each reflection panel includes a plurality of distinct light reflection elements formed thereon.  
20

5. A lamp as claimed in any preceding claim in which the reflection panels form sides of a truncated pyramidal form, the number of sides thereof equalling the number of panels.

25 6. A lamp as claimed in any preceding claim in which there are between three and twelve said panels.

7. A lamp as claimed in claim 6 in which four said panels are provided.

30 8. A lamp as claimed in claim 6 in which six said panels are provided.

9. A lamp as claimed in any preceding claim which has a flat front face.

5 10. A lamp as claimed in any preceding claim which is adapted for operation at 12V.

11. A lamp as claimed in any preceding claim which has a maximum cross-dimension less than 100mm.

10 12. A lamp as claimed in claim 11 which has a maximum cross-dimension of about 50mm.

15 13. A lamp as claimed in claim 1 or claim 4 or any preceding claim when dependent upon claim 1 or claim 4 in which each light reflection element includes a convex front surface.

20 14. A lamp as claimed in claim 1 or claim 4 or any preceding claim when dependent upon claim 1 or claim 4 in which each light reflection element is elongate.

15. A lamp as claimed in claim 14 in which each light reflection element extends in a direction perpendicular to a longitudinal axis of the lamp.

25 16. A lamp as claimed in claim 1 or claim 4 or any preceding claim when dependent upon claim 1 or claim 4 in which between five and 20 said light reflection elements are provided on each panel.

30 17. A lamp as claimed in claim 16 in which about eight to ten said elements are provided on each panel.

18. A lamp as claimed in any preceding claim in which the light source is enclosed in a chamber, the chamber being located inside a generally truncated pyramidal space formed by the reflector.

5 19. A lamp substantially as described herein with reference to the accompanying drawing.

10 20. A light fitting including a lamp as claimed in any preceding claim fitted thereto, the fitting being adapted to be fitted to a layer of building material with the layer substantially recessed.

15 21. A light fitting including a lamp as claimed in any one of claims 1 to 19 fitted thereto, the lamp being retained in position by a non-circular-sectioned circlip.

22. A light fitting as claimed in claim 21 in which the circlip is polygonal.

20 23. A light fitting as claimed in claim 22 in which the circlip is square or hexagonal.

24. A light fitting substantially as described herein with reference to the accompanying drawings.

25 25. A building including a light fitting as claimed in any one of claims 20 to 24 fitted thereto.


26. A building substantially as described herein with reference to the accompanying drawings.

**ABSTRACT****LAMPS**



5       A square or hexagonal lamp 10,10' has a light source 14 and a reflector including a plurality of reflection panels 20. Each reflection panel includes a plurality of distinct light reflection elements 22 and each reflection panel is generally outwardly concave in form towards the light source.

10     (Figure 1A)


1/5

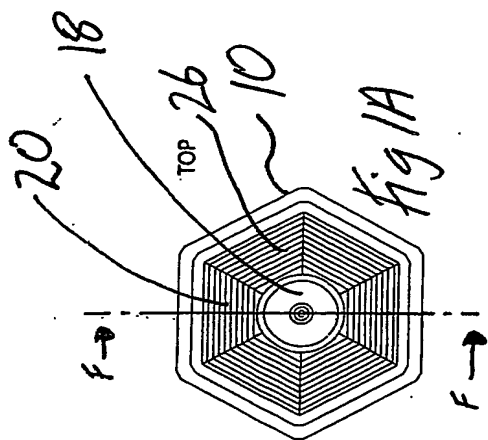


SIDE




FRONT




BOTTOM




SIDE




FRONT




CROSS SECTION

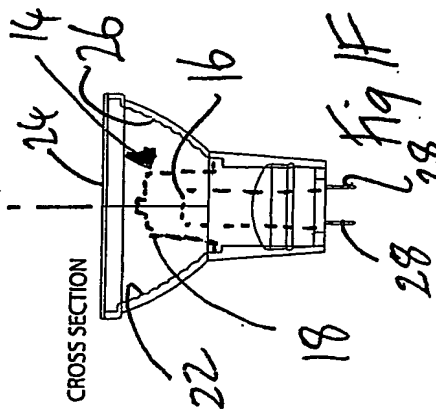

2/5

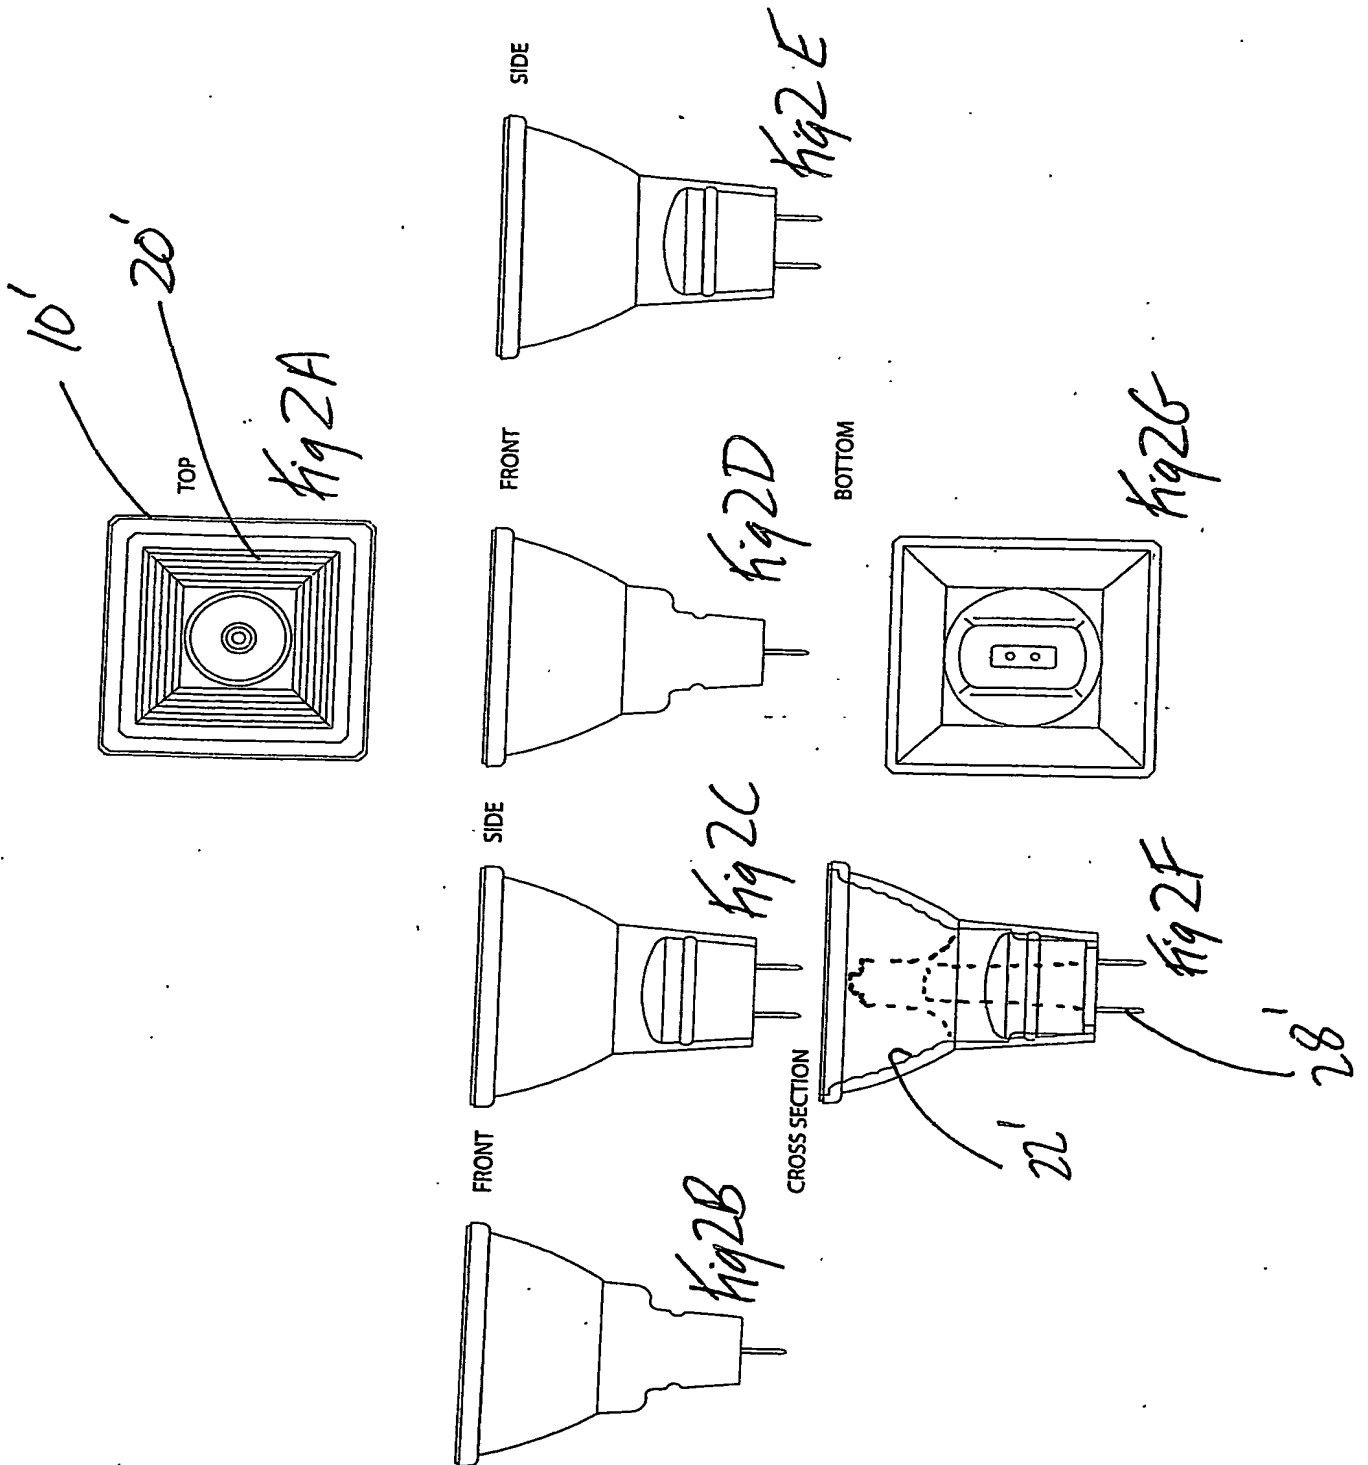


3/5

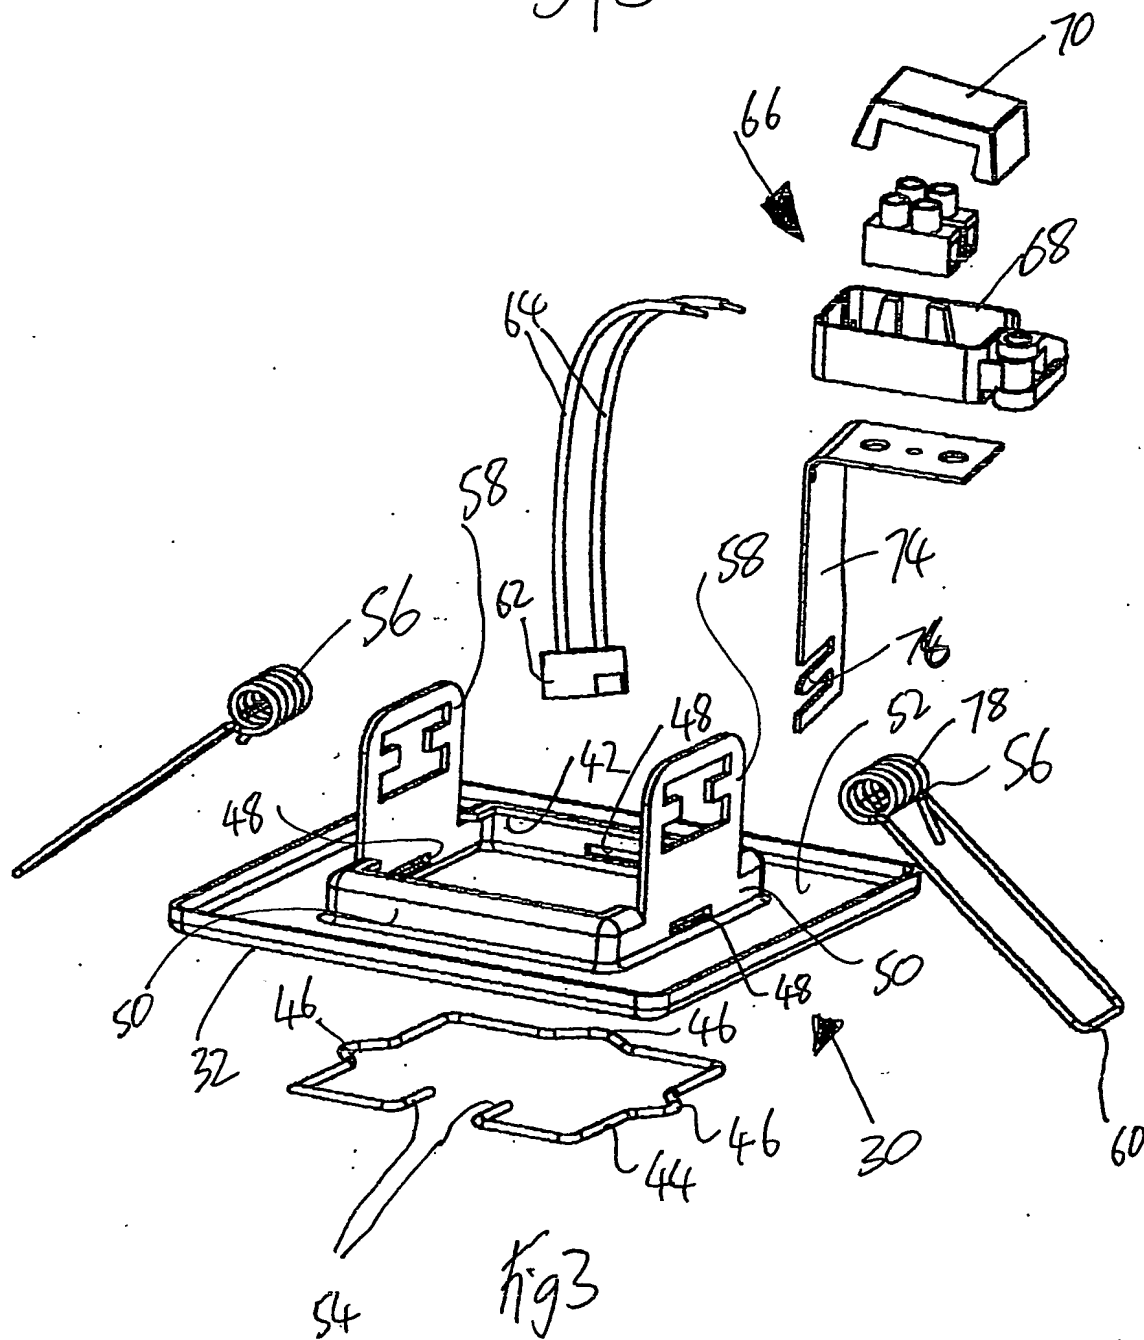



4/5

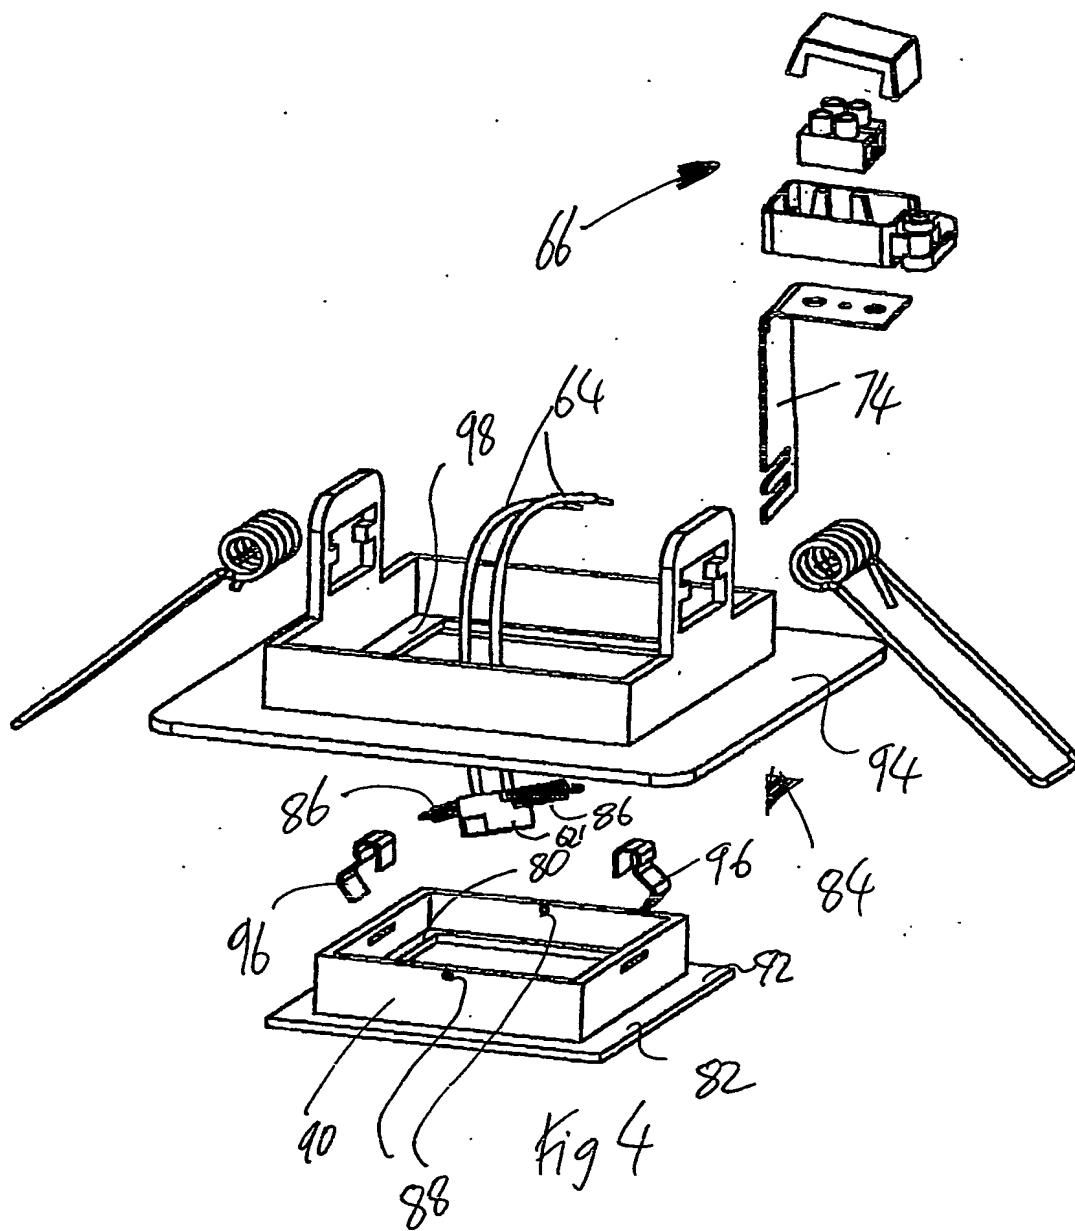

BEST AVAILABLE COPY

5/5

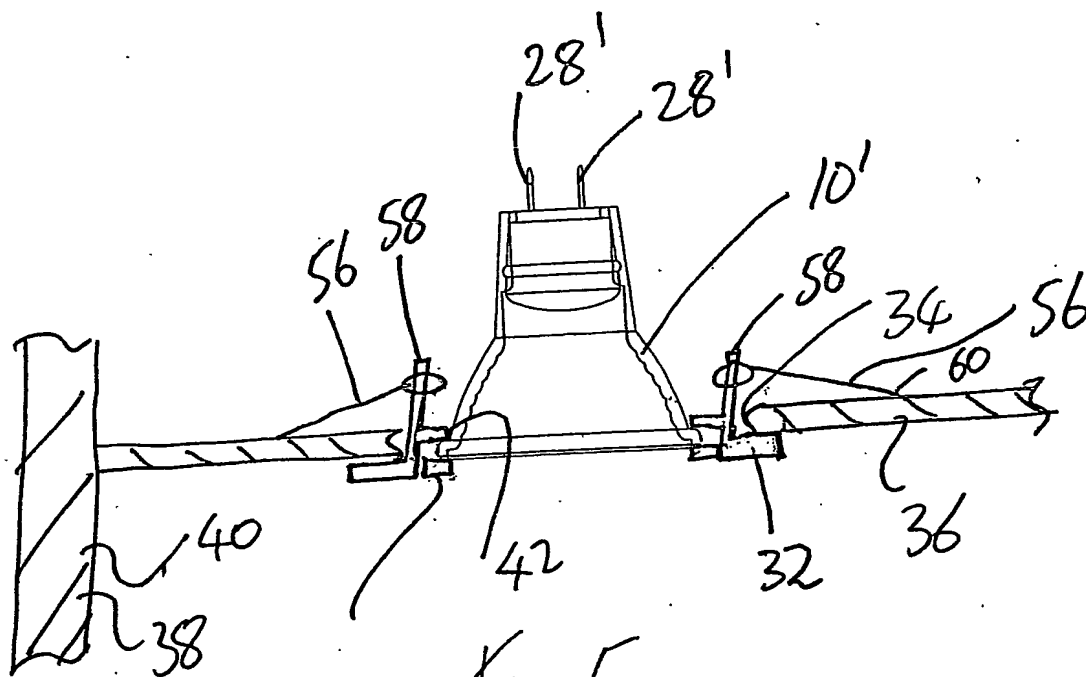


Fig 5